


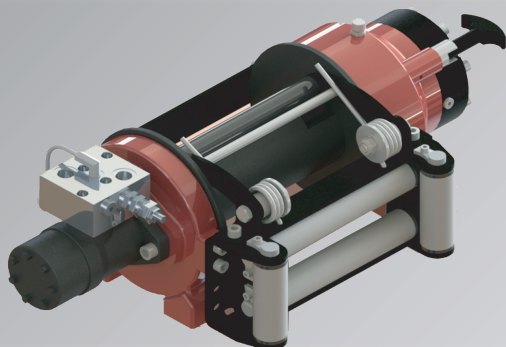

- Extra reinforced aluminium cast body through the heat treatment and industrial design
- Light and powerful design
- %100 Holding Negative-Acting Hydraulic brake system.
- Standard Pressure Roller and Roller Fairlead.
- Easy assembly, High rope capacity and High torque hydromotor
- Standard manual rope unloading system

Specifications

Max.pulling capacity (kg / lbs)	: 4300 kg (9477 lbs)
Max.rope length (mt / ft)	: 65 m (215 ft) 2160 Mpa
Recommended wire rope (mm / in)	: 10 mm (3/8")
Hydromotor (cc / in³) :	: 315 cc (19 in³)
Max. pump flow (l / min - gal / min)	: 60 lt (15.8 gal)
Gear ratio:	: 5,6 : 1
Oil types and capacity	: 85W 90 - 0,75 lt.
Max. working pressure (bar / psi)	: 130 bar (1885 psi)

Winch : (kg / lbs)

44 kg (96.8 lbs)

Roller Fairlead : (kg / lbs)

6 kg (13,22 lbs)

Cable Tensioner

2,5 kg (5,51 lbs)

Mounting Bolts

8 pieces M12 8,8

Standards

Cable tensioner
Roller Fairlead

Optinal

Air Clutch
IP67 - IP 68



Hydraulic Inlets

G 1/2"




Rope Winding Layer	Pulling Capacity kg / lbs	Rope Speed m / min- ft / min	Rope Length m / ft
1	4300 / 9477	11 / 36	8 / 27
2	3700 / 8157	13 / 42	17 / 56
3	3248 / 7160	15 / 48	27 / 89
4 EN	2895 / 6381	17 / 54	39 / 127
5	2610 / 5754	18 / 60	52 / 170
6	2377 / 5239	20 / 66	65 / 215

Warning !!

- Before operate the winch, A-B lines must be open to T line (tank line) of the control valve in center position.
- This winch is desingd and manufactured for pulling, don't lift person or metarial.
- Always keep last 5 wrap on the drum.
- The tecnical details given above just for infarmation.
- HAMMER WINCH keeps the to change the tecnical. details
- Pneumatic Working Pressure: Min - Max 9 - 12 bar (130 - 174 psi)

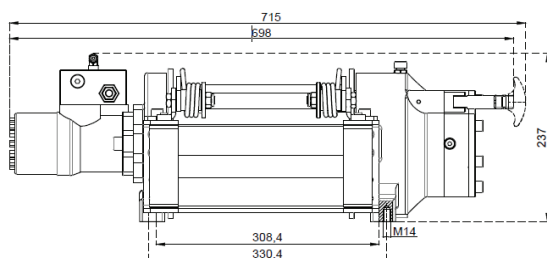

Manual

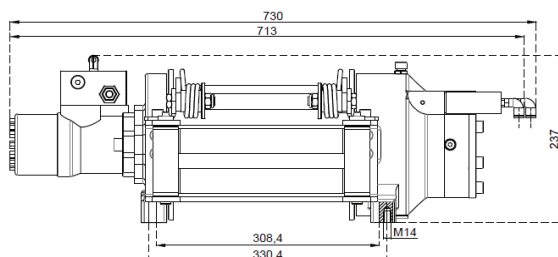

Air Clutch

